

Strømforsyning.
Stromversorgung.
Power supply.
1N 230V~ 50Hz max. 13A

Sikkerhedsafbryder.
Sicherheitsschalter.
Safety cut-out.


Brugerpanelet SKAL monteres frostfrit.
Die Steuerungstafel MUSS frostfrei montiert werden.
The control panel has to be placed in a frost-free place.
(+1 - +40°C)

Min. 2x2x0,25mm² (parsnoet), max. 50m
(Paarweise gedreht)
(twisted in pairs)

TILLUFT
ZULUFT
INLET
TULOILMA SISÄLLE

AFKAST
FORTLUFT
OUTLET
JÄTEILMA ULOS

Kondensatløb
Kondensatablauf
Drain

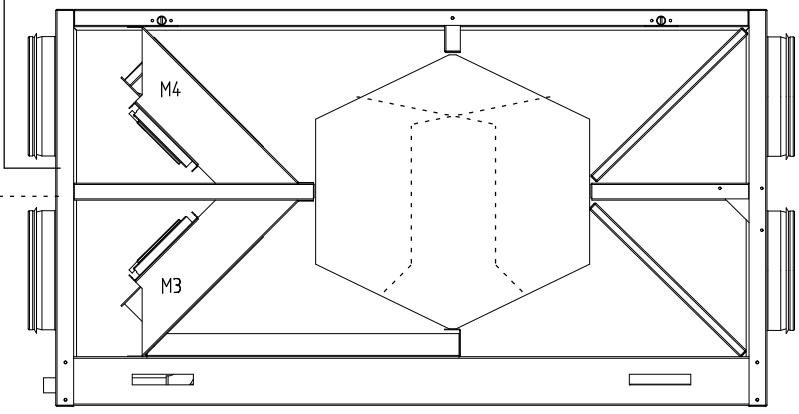


FRALUFT
ABLUFT
EXHAUST
POISTOILMA TALOSTA

UDELUFT
AUSSENLUFT
OUTDOOR AIR
RAITISILMA ULKOA

Sikkerhedsafbryder.
Sicherheitsschalter.
Safety cut-out.




Strømforsyning.
Stromversorgung.
Power supply.
1N 230V~ 50Hz max. 13A

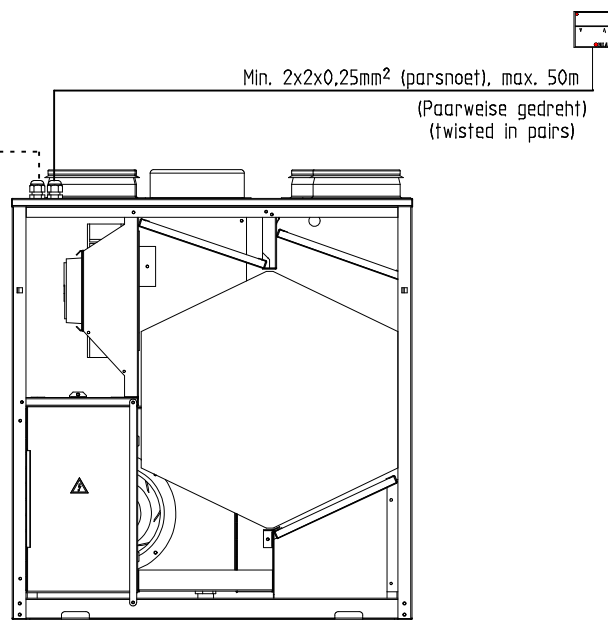

Min. 2x2x0,25mm² (parsnoet), max. 50m
(Paarweise gedreht)
(twisted in pairs)

Brugerpanelet SKAL monteres frostfrit.
Die Steuerungstafel MUSS frostfrei montiert werden.
The control panel has to be placed in a frost-free place.
(+1 - +40°C)

Type:	7112x_EL120811	Nationalitet:	DK / N / S / SF	Rev.:	Init.:	RMI
Dato:	15/08 2011	Funkt.:	Plac.:	Blad:	2	

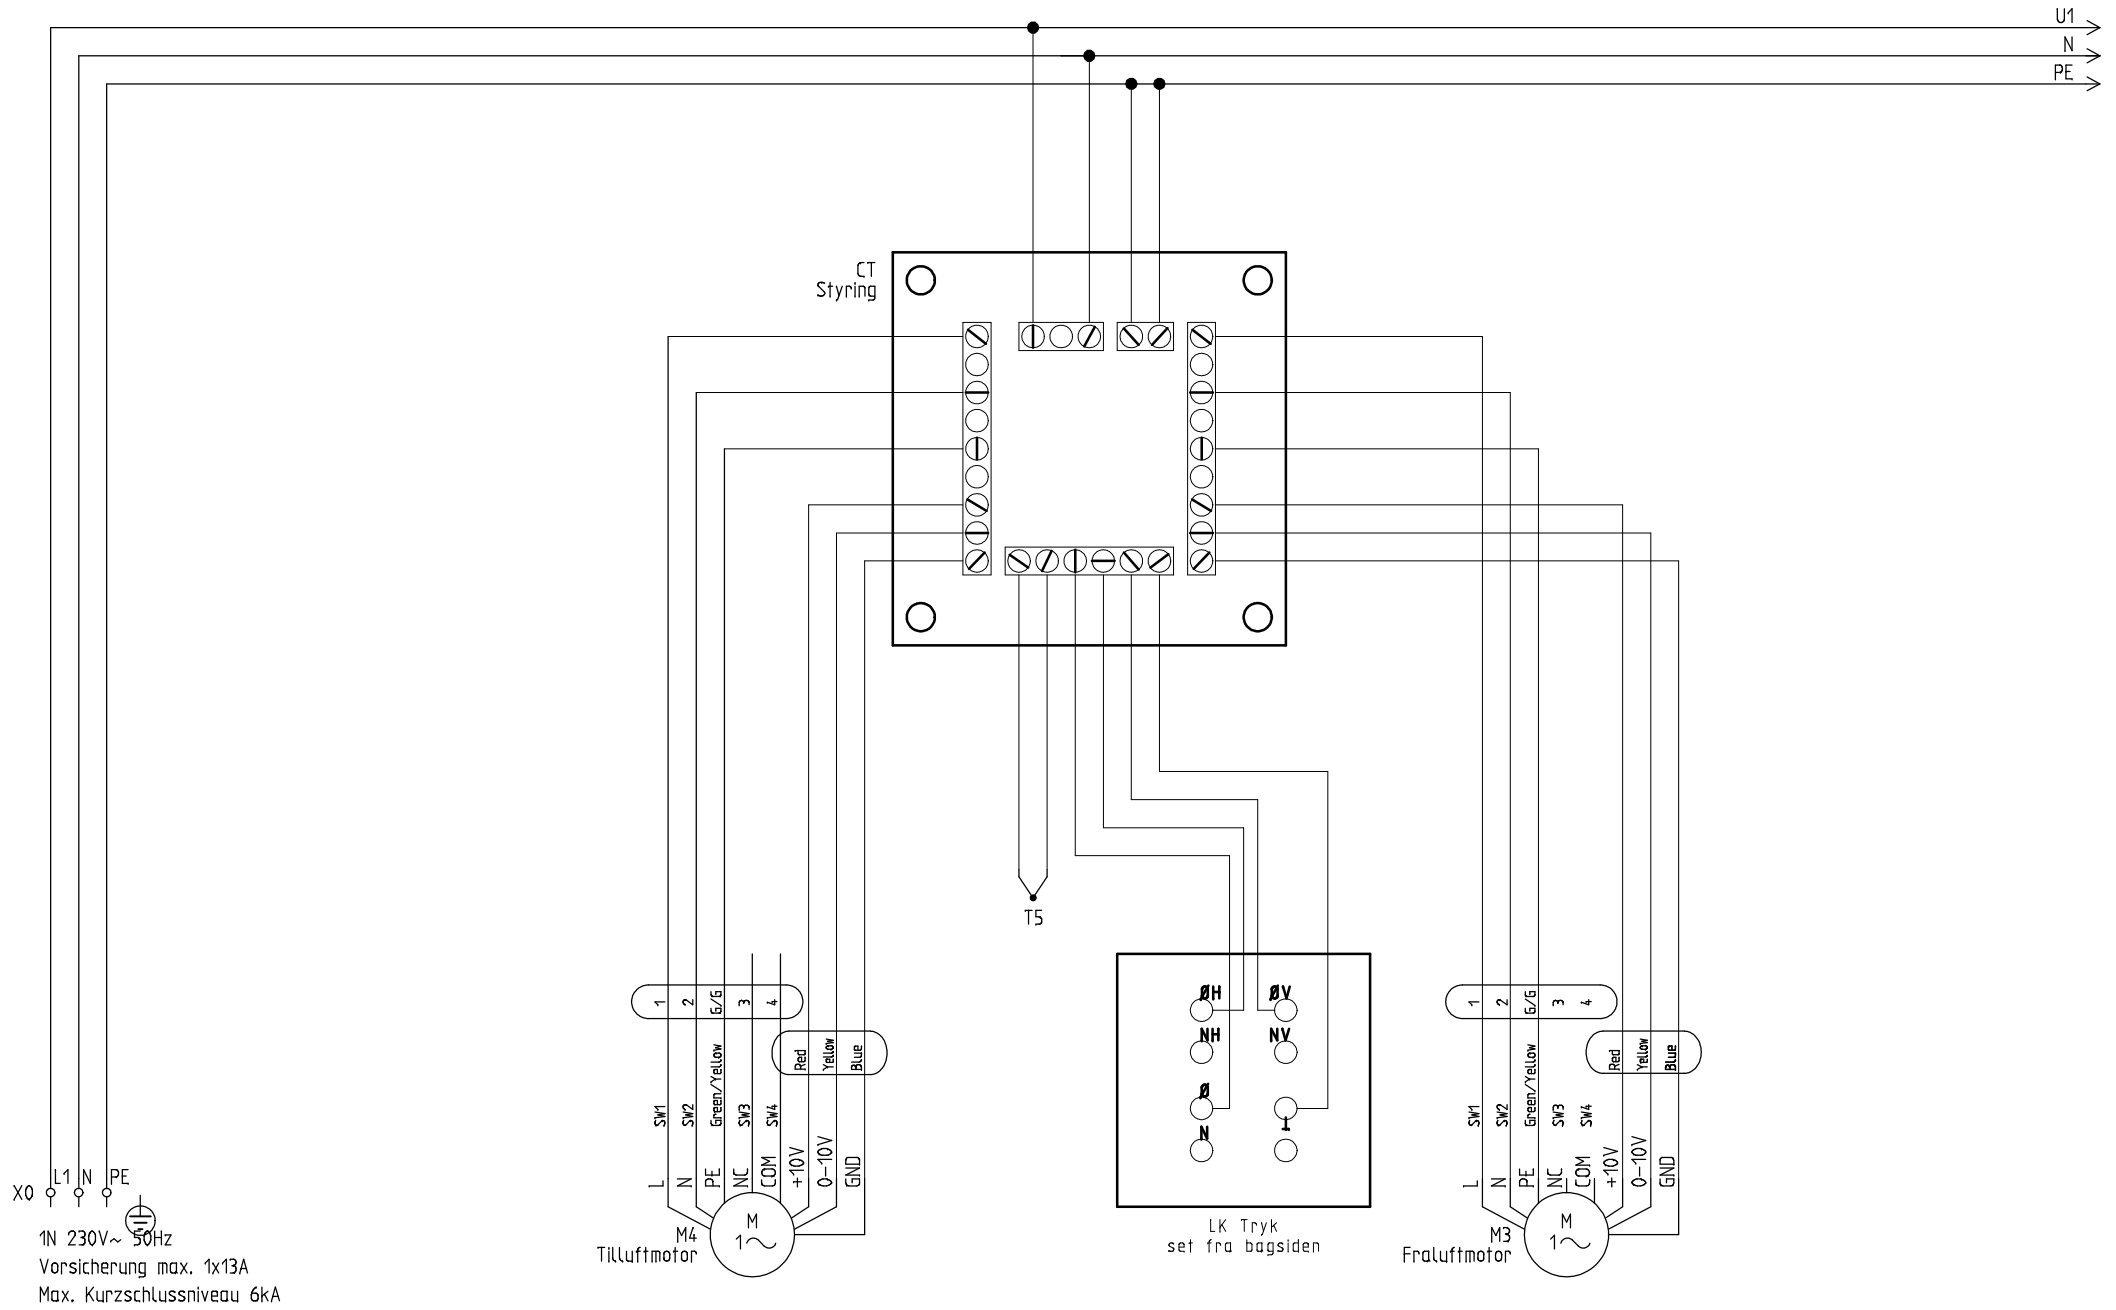

NILAN A/S
 Nilanvej 2
 DK-8722 Hedensted
 Tlf. +4576752500
 Fax +4576752525
 http://www.nilan.dk
 Email: nilan@nilan.dk

Ventilationsunit NILAN Comfort ECO
 Varenr.: 71124 / 71125

Styreprint med tilslutninger

Type:	7112x_EL120811	Nationalitet:	DK / N / S / SF	Rev.:	Init.:
Dato:	15/08 2011	Funkt.:	Plac.:	Blad:	RMI 3

